


WINNER



BODY

Electrostatic powder coated aluminium body.

LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

DRIVER


Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

LENS

IP65 glass lens.

PCB

Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.
Copper Thickness: 1 OZ, HASL surface coating.

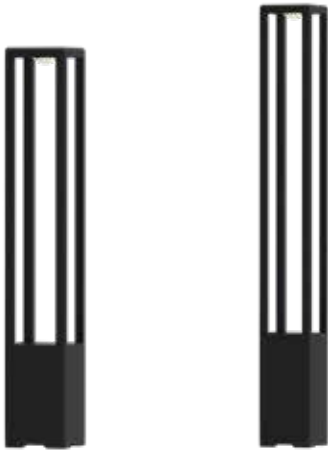


TECHNICAL SPECIFICATIONS

RAL CODES

Standard	Optional	Optional
RAL 7016	RAL 9016	RAL 9022

SYMMETRIC

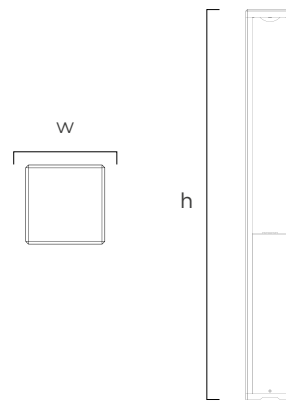

Product Code	Power	Lumen	Color Temperature	Dimensions w h (mm)	Weight	Carton Pieces
DTY.056	12W	1400	3000-6500K	100x100x200	1,75 kg	1
	12W	1400	3000-6500K	100x100x400	2 kg	1
	12W	1400	3000-6500K	100x100x600	2,5 kg	1
	12W	1400	3000-6500K	100x100x800	3 kg	1